


## Connecting an HID Classic swipe reader to Net2

### Technical Support

 01273 811011


 [support@paxton.co.uk](mailto:support@paxton.co.uk)

Technical help is available: Monday - Friday from 07:00 - 19:00 (GMT)  
Saturday from 09:00 - 13:00 (GMT)

Documentation on all Paxton products can be found on our website - <http://www.paxton.co.uk/>

### Net2 Reader Connections:

Cable Pinout	ACU terminal
Red	+12V
-	Red LED
-	Amber LED
Brown (if present)	Green LED
Green	Wiegand D0
White	Wiegand D1
	NOT USED
Black & Screen	0V

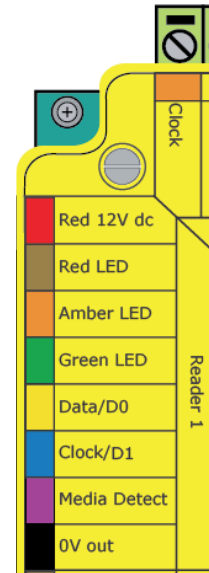

Ensure any unused wires are safely terminated.

### Additional information:

The output from the reader can be either Wiegand or Clock & Data. The bit output from the reader is dependant on the card encoding used.

This should be confirmed with HID if it is not known to ensure that the correct parameters are used in the Net2 software. (Net2 server configuration utility)

The reader can be supplied with or without an LED.

### Additional settings:

To configure the LED setting, open the Net2 server configuration utility and on the 'General' tab, check the 'Display reader LED's in OEM style' box.

If the option is not available, please contact Technical support for further advice.