

## Connecting an HID iCLASS R90 reader to Net2

### Technical Support



01273 811011




[support@paxton.co.uk](mailto:support@paxton.co.uk)

Technical help is available: Monday - Friday from 07:00 - 19:00 (GMT)  
Saturday from 09:00 - 13:00 (GMT)

Documentation on all Paxton products can be found on our website - <http://www.paxton.co.uk/>

### Net2 Reader Connections:

Cable Pinout	ACU terminal
Not used	+12V
P2-4	Red LED
-	Amber LED
P2-3	Green LED
P1-6	Wiegand D0
P1-7	Wiegand D1
-	NOT USED
P1-5	0V

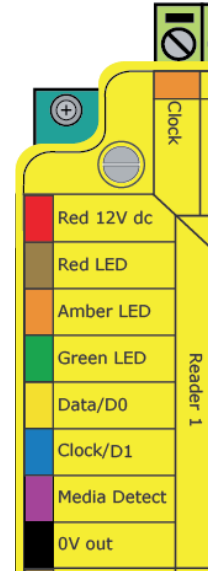

Ensure any unused wires are safely terminated.

### Additional information:

As standard, the reader is set to control the LEDs. This must be changed to LED host control, using the configuration card HID06 LED and Beep card, available from HID.

The output from the reader is in a Wiegand format. The bit output from the reader is dependant on the iCLASS card encoding used. The bit output should be confirmed with HID if unknown, to ensure the correct settings are applied in the Net2 software.

The R90 requires a 3 amp PSU, and therefore must not be powered from the Net2 controller.

### Additional settings:

To configure the LED setting, open the Net2 server configuration utility and on the 'General' tab, check the 'Display reader LED's in OEM style' box.

If the option is not available, please contact Technical support for further advice.