



Paxton

Ins-30016 12V DC 1A power supply in plastic housing



Technical Support



01273 811011



support@paxton.co.uk

Technical help is available:

Monday - Friday from 07:00 - 19:00 (GMT)

Saturday from 09:00 - 13:00 (GMT)

Documentation on all Paxton products can be found on our website - <http://www.paxton.co.uk/>

Fitting




Illustrations in this instruction show the standalone 1A module.

Where the 1A power supply forms part of a larger module (as shown above) the unit should be wired to the AC supply in exactly the same manner.

Wiring

The figure 8 power lead provided is pre-stripped at one end for connection to a fused spur.

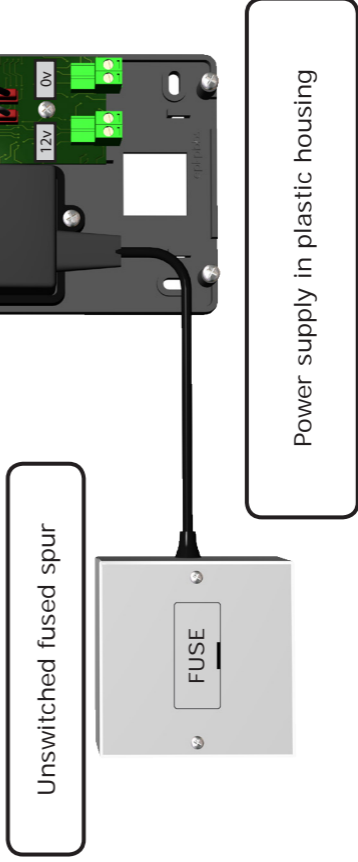

Specifications

Environment	Min	Max	
Operating temperature	- 20 °C	+ 55 °C	
Waterproof			NO
Cable length			2 metres
Electrical	Min	Max	
Mains supply voltage	100V AC	240V AC	+/- 5%
Mains supply frequency	50 Hz	60 Hz	+/- 3%
Voltage	11.4V DC	13.6V DC	
Output voltage ripple		100 mV	
Current		1A	
Dimensions	Width	Height	Depth
Power supply only	108 mm	175 mm	40 mm
Control unit (Black case)	170 mm	175 mm	40 mm
Control unit (White case)	200 mm	200 mm	75 mm



Paxton Access Ltd hereby declares that this product is in conformity with all the essential requirements of the Directive 2014/53/EU.
<http://paxton.info/3685>

The full declaration of conformity is available on request. Contact details are provided at: <http://paxton.info/596>

This product is not suitable for retail sale. All warranties are invalid if this product is not installed by a competent person.