


# Connecting a PHERA 2Crypt reader


## Overview

This reader is configured for 42 bit Wiegand output, and reads PHERA 2Crypt tokens.

To set up the Net2 Wiegand setting, you will need to use the Net2 Server Configuration Utility. Once completed, set the reader "Token data format" in Net2 to "Wiegand Custom".

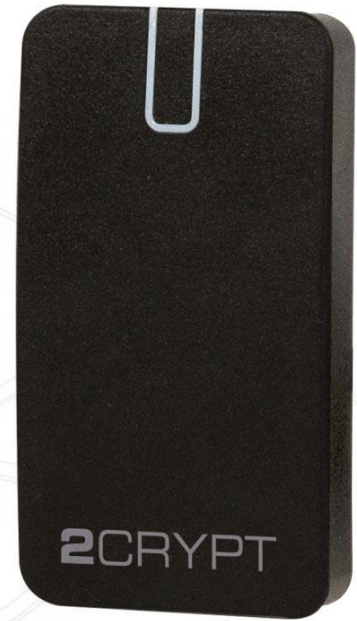

Cable Pinout	ACU terminal
Red	+12V
Brown	Red LED
-	Amber LED
Orange	Green LED
Green	Wiegand D0
White	Wiegand D1
-	NOT USED
Black	0V



Ensure any unused wires are safely terminated.


To configure the LED setting, if you would like other LED schemes, open the Net2 Server Configuration Utility and press the "General" tag, check the "Display reader LED's in OEM style box".

If this option is not available, please contact Technical Support for further advice.


 +44 (0)1273 811011  
 support@paxton.co.uk  
 paxton.support


 +49 (0) 251 2080 6900  
 support@paxton-gmbh.de  
 paxton.gmbh.support


 +33 (0)157 329356  
 support@paxtonaccess.fr  
 paxton.support

 +32 (0)78485147  
 support@paxton-benelux.com  
 paxton.benelux.support


 +31 (0)76 3333 999  
 support@paxton-benelux.com  
 paxton.benelux.support

 +27 (0)21 4276691  
 support@paxtonaccess.co.za  
 paxton.support

 +1(800) 672-7298  
 supportUS@paxton-access.com  
 usapaxton.support

 +11 5715088198  
 soporte@paxton-access.com  
 paxton.soporte

 +1 (864) 751-3501  
 soporte@paxton-access.com  
 paxton.soporte

 8000 3570 3783  
 support@paxtonaccess.ae  
 paxton.support

 +44 (0)1273 811011  
 support@paxton.co.uk  
 paxton.support