

Technical Support



01273 811011



support@paxton.co.uk

Technical help is available: Monday - Friday from 07:00 - 19:00 (GMT)
Saturday from 09:00 - 13:00 (GMT)


Documentation on all Paxton products can be found on our website - <http://www.paxton.co.uk/>

The single-piece Legacy Mullion Reader has a read range of up to 4 inches (10 cm) and operates from 4 to 16V DC

The unit is supplied as a Wiegand Output or ABA Track 2 magstripe output (Clock/data) and cannot be reconfigured in the field.

Net2 Reader Connections:

| Cable Pinout | ACU terminal |
|--------------|--------------------|
| Red | +12V |
| - | Red LED |
| - | Amber LED |
| Brown | Green LED |
| Green | Data / Wiegand D0 |
| White | Clock / Wiegand D1 |
| | NOT USED |
| Black | 0V |

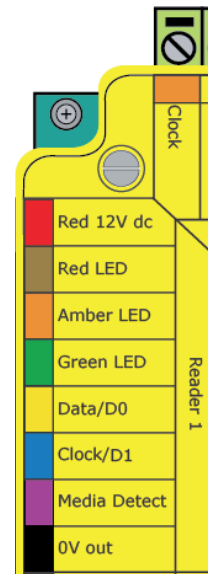

Additional information:

To configure the LED setting, open the Net2 server configuration utility and on the 'General' tab, check the 'Display reader LED's in OEM style' box.

If the option is not available, please contact Technical support for further advice.

Additional settings:

Further information on use and programming is available at:

http://www.hidglobal.com/prod_detail.php?prod_id=133