


Connecting a CDVI DGLP/T/W proximity reader to Net2

Overview


The reader wires to a separate module, and it is this module that connects to the Net2 controller. The module has two jumpers (ST4 and ST5) to set the output format.

The jumper on ST4 should be across pins 2 and 3.

The jumper on ST5 can be set to either 26, 30 or 44 bit output, but the corresponding Wiegand format must be set up for the reader. As the reader is reading EM4100 tokens, it would make sense to set the jumper to pin pair 1, and then use the embedded 26 bit Wiegand format in Net2.

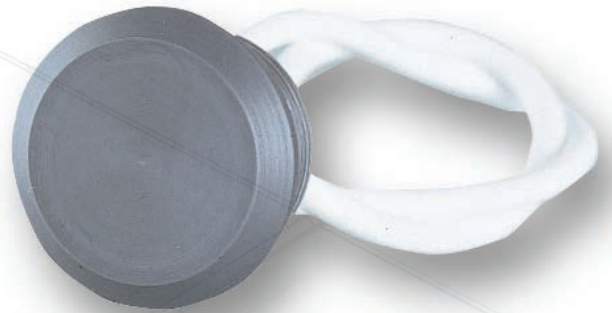

Cable Pinout	ACU terminal
+ ve	+12V
-	Red LED
-	Amber LED
-	Green LED
D0	Wiegand D0
D1	Wiegand D1
-	NOT USED
- ve	0V



Ensure any unused wires are safely terminated.



+44 (0)1273 811011
support@paxton.co.uk
paxton.support



+49 (0) 251 2080 6900
support@paxton-gmbh.de
paxton.gmbh.support



+33 (0)157 329356
support@paxtonaccess.fr
paxton.support



+32 (0)78485147
support@paxton-benelux.com
paxton.benelux.support



+31 (0)76 3333 999
support@paxton-benelux.com
paxton.benelux.support



+27 (0)21 4276691
support@paxtonaccess.co.za
paxton.support



+1(800) 672-7298
supportUS@paxton-access.com
usapaxton.support



+11 5715088198
soporte@paxton-access.com
paxton.soporte



+1 (864) 751-3501
soporte@paxton-access.com
paxton.soporte



8000 3570 3783
support@paxtonaccess.ae
paxton.support



+44 (0)1273 811011
support@paxton.co.uk
paxton.support